
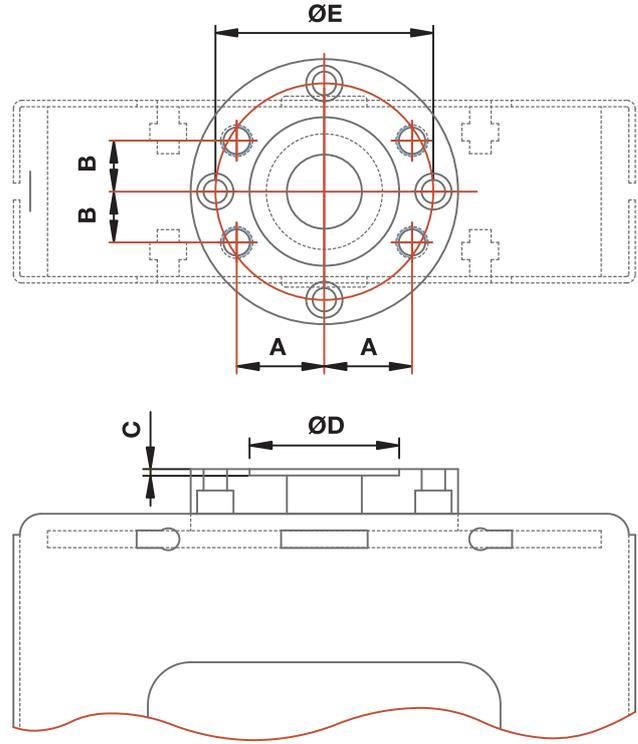


## 2.2.9. E

### E. Electric actuator

Manufactured from DN 50 up to DN 600, for any other sizes, please check with our Technical Department.

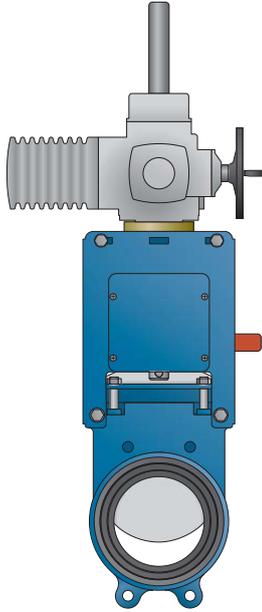


VALVE	STEM SCREW	TYPE OF ELECTRIC ACT.	BRIDGE-FLANGE FASTENING			FLANGE-ELECTRIC ACT. FASTENING	
			A	B	C	ØD	ØE
DN50	Tr. left 20x4	AUMA SA 07.2	33	19	3	55	4 Allen size M10 on ø70
DN65	Tr. left 20x4		33	19	3	55	
DN80	Tr. left 20x4		33	19	3	70	
DN100	Tr. left 20x4		33	19	3	70	
DN125	Tr. left 20x4	AUMA SA 07.6	31	22	3	70	4 Allen size M10 on ø102
DN150	Tr. left 20x4		31	22	3	70	
DN200	Tr. left 25x5		41	24	3	70	
DN250	Tr. left 25x5		41	24	3	70	
DN300	Tr. left 25x5	AUMA SA 10.2	41	24	3	70	4 Allen size M10 on ø102
DN350	Tr. left 25x5		41	24	3	70	
DN400	Tr. left 35x6		41	24	3	70	
DN450	Tr. left 35x6		55	39	4	100	
DN500	Tr. left 35x6	AUMA SA 14.2	55	39	4	100	4 Allen size M16 on ø140
DN600	Tr. left 35x6		55	39	4	100	

The manufacturer reserves the right to make changes without prior notification.

## 2.2.9. E

Measurements.

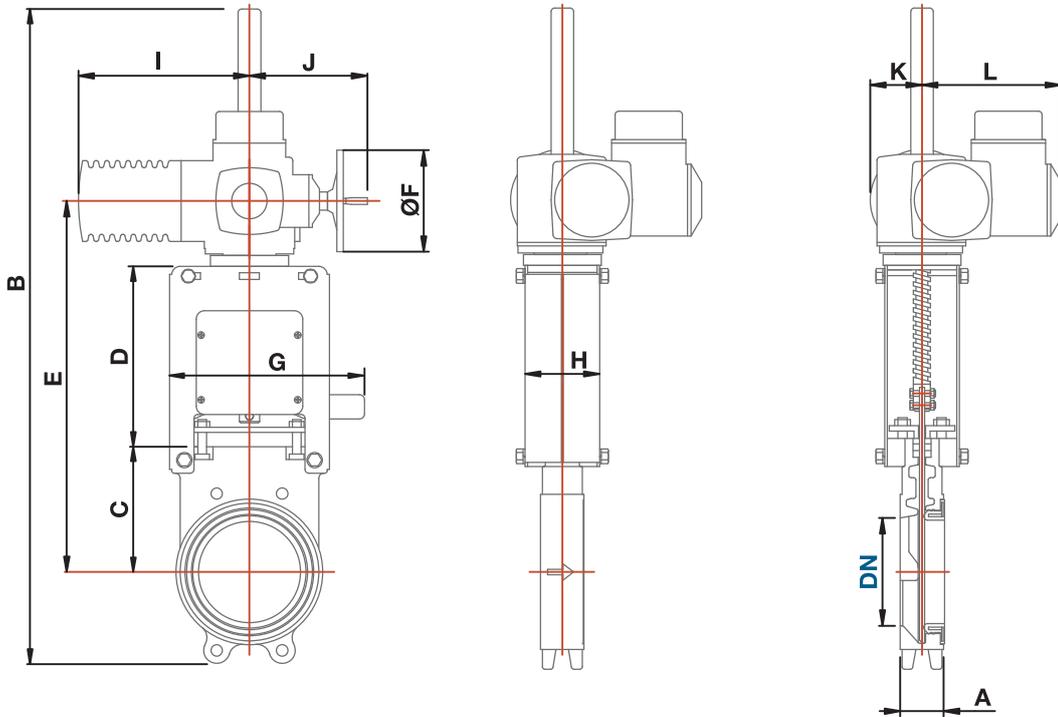

DN	A	B	C	D	E	ØF	G	H	I	J	K	L
50	50	633	115	140	358	160	152	68	265	249	62	238
65	50	662	115	166	384	160	190	68	265	249	62	238
80	50	708	130	175	408	160	187	70	265	249	62	238
100	50	746	143	195	441	160	204	70	265	249	62	238
125	50	804	155	223	481	160	233	78	265	249	62	238
150	60	871	176	254	533	160	259	79	265	249	62	238
200	60	996	204	318	627	200	326	88	283	254	65	248
250	65	1,151	253	364	722	200	370	90	283	254	65	248
300	70	1,337	303	424	832	200	430	95	283	254	65	248
350	90	1,475	343	470	918	200	473	94	283	254	65	248
400	100	1,938	400	549	1,054	200	543	110	283	254	65	248
450	100	2,104	452	599	1,171	315	597	126	389	336	91	286
500	110	2,233	505	675	1,300	315	652	126	389	336	91	286
600	110	2,394	620	836	1,576	315	752	120	389	336	91	286

Assembly between Flanges PN10 / DN Nominal diameter / ØF Handwheel diameter  
Measurements in mm.

The manufacturer reserves the right to make changes without prior notification.