
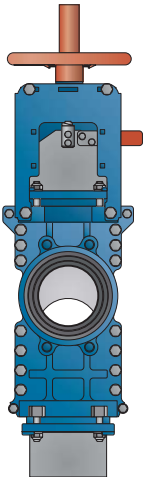


2.2.1. VA

VA. Handwheel with rising stem.

Particularly suitable for facilities in which space is not a problem. Manufactured from DN 50 up to DN 500, for any other sizes, please check with our Technical Department.

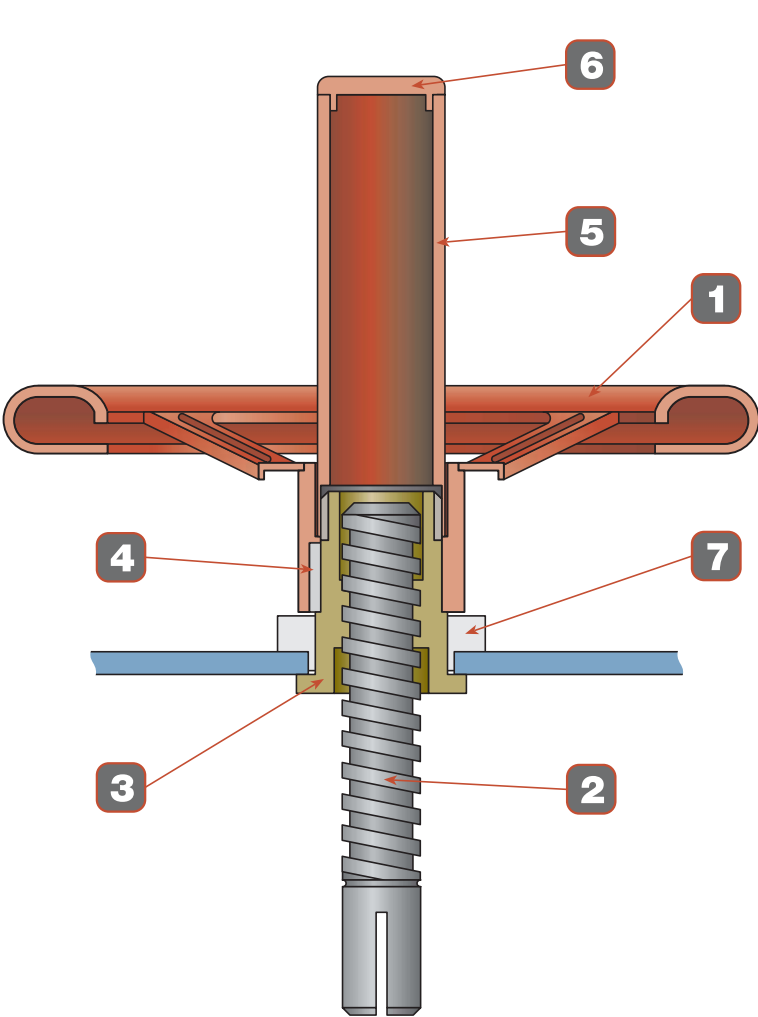


	DESCRIPTION	MATERIAL	U. (units)
1	Handwheel	Steel	1
2	Stem	AISI-303	1
3	Nut	Brass	1
4	Cotter	Steel	1
5	Protection	Steel	1
6	Plug	Plastic	1
7	Bearing	Nylon	1

* Other materials available on request.

2.2.1. VA

Measurements.

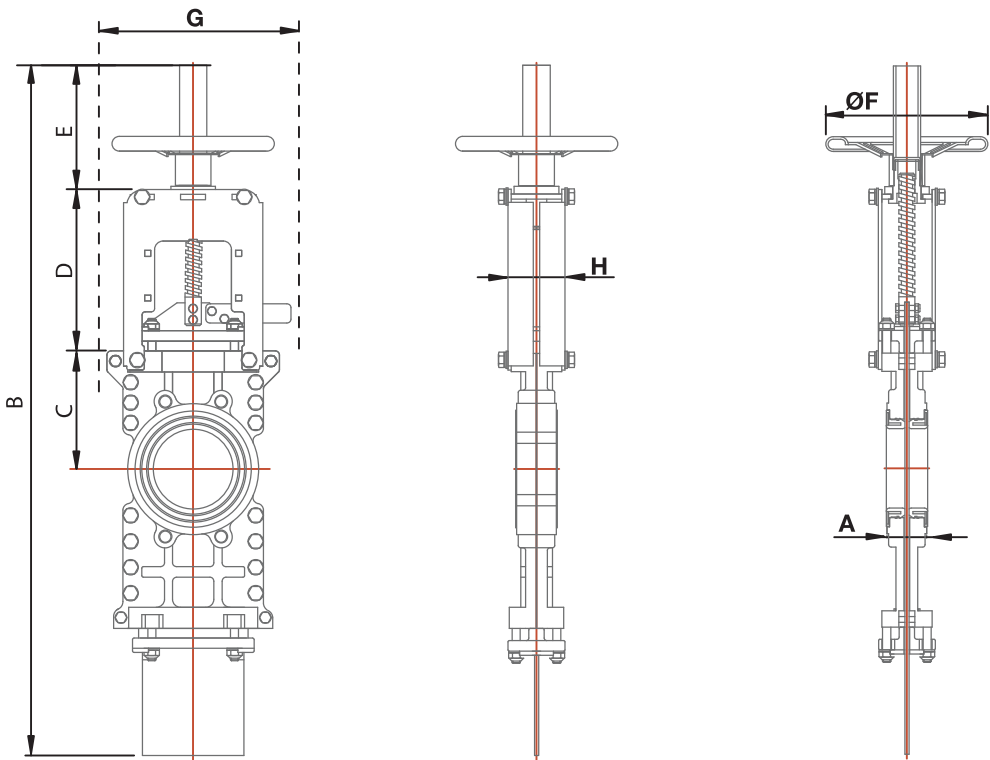

DN	A	B	C	D	E	ØF	G	H	WEIGHT	PN
50	50	585	115	143	96	200	173	68	12	10
65	50	667	110	170	109	200	209	68	13	10
80	50	742	127	179	139	200	209	70	15	10
100	50	832	146	199	134	200	226	70	17	10
125	50	1,001	157	224	205	250	265	78	29	8
150	60	1,108	184	254	191	250	275	79	43	8
200	60	1,400	209	315	265	350	342	90	70	8
250	65	1,665	260	350	313	350	395	92	95	6
300	70	2,009	280	422	434	400	457	95	128	6
350	90	2,229	352	471	398	500	533	94	178	5
400	100	2,546	362	553	474	500	565	110	275	5

Assembly between Flanges PN10 / DN Nominal diameter / ØF Handewheel diameter
G Maximun width / Weight in Kg. /PN Nominal pressure in bar. / Measurements in mm.