


2.2.8. C

C. Chain wheel

Manufactured from DN 50 up to DN 600, for any other sizes, please check with our Technical Department.

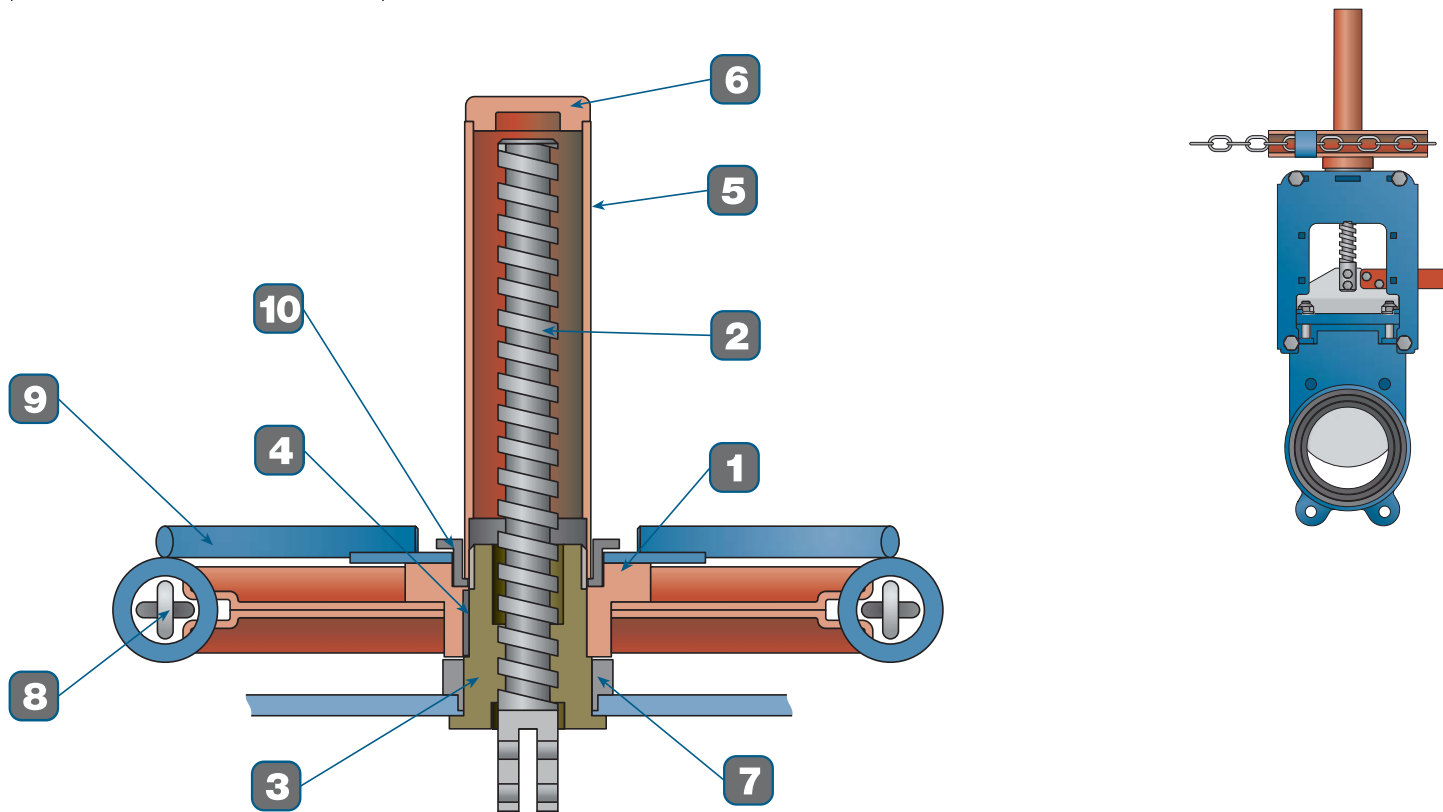


	DESCRIPTION	MATERIAL	U.
1	Handwheel	Steel	1
2	Stem	AISI-303	1
3	Nut	Brass	1
4	Cotter	Steel	1
5	Protection	Steel	1
6	Plug	Plastic	1
7	Bearing	Nylon	1
8	Chain	Steel	1
9	Chain guide	Steel	1
10	Bushing	Steel	1

* Other materials available on request.

The manufacturer reserves the right to make changes without prior notification.

2.2.8. C

Measurements.

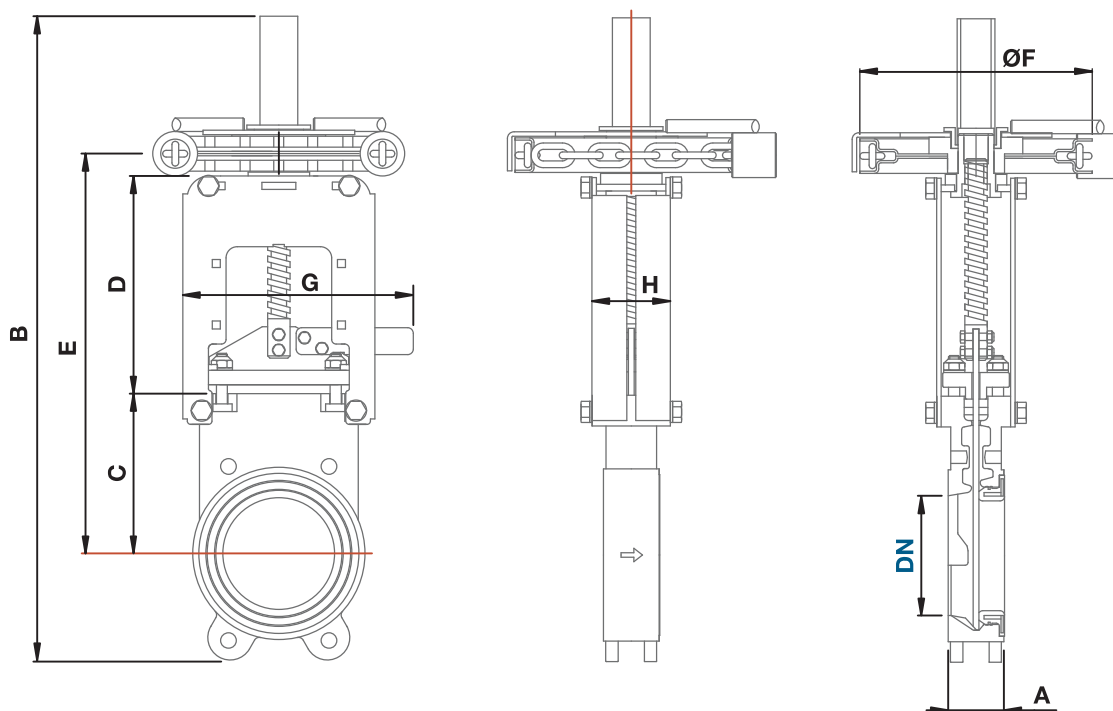


DN	A	B	C	D	E	ØF	G	H
50	50	439	115	140	272	210	152	68
65	50	467	115	166	297	210	190	68
80	50	536	130	175	322	210	187	70
100	50	574	143	195	355	210	204	70
125	50	702	155	223	400	260	233	78
150	60	769	176	254	452	260	259	79
200	60	928	204	318	547	300	326	88
250	65	1,096	253	364	642	300	370	90
300	70	1,299	303	424	752	300	430	95
350	90	1,426	343	470	834	400	473	94
400	100	1,654	400	549	984	500	543	110
450	100	1,874	452	599	1,086	500	597	126
500	110	2,097	505	675	1,215	500	652	126
600	110	2,563	620	836	1,491	500	752	120

Assembly between Flanges PN10 / DN Nominal diameter
 ØF Handwheel diameter / Measurements in mm.

The manufacturer reserves the right to make changes without prior notification.

2.2.8. C

Types of chain handwheel according to the valve diameter.

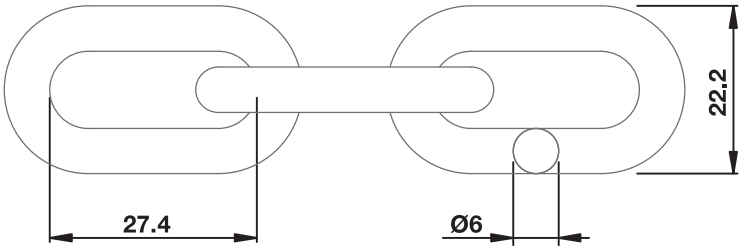

HANDWHEEL FEATURES				
VALVE	TYPE OF HANDWHEEL	No. of TEETH	CHAIN	Weight
DN50	Ø210	11	6	1.6
DN65				
DN80				
DN100				
DN125	Ø260	14	6	3.1
DN150				
DN200				
DN250				
DN300	Ø300	16	6	4.2
DN350				
DN400				
DN500				
DN600	Ø400	22	6	7.3
	Ø500	28	6	12.2

DN Nominal diameter / Weight in Kg/m. (approx.) / Measurements in mm.