
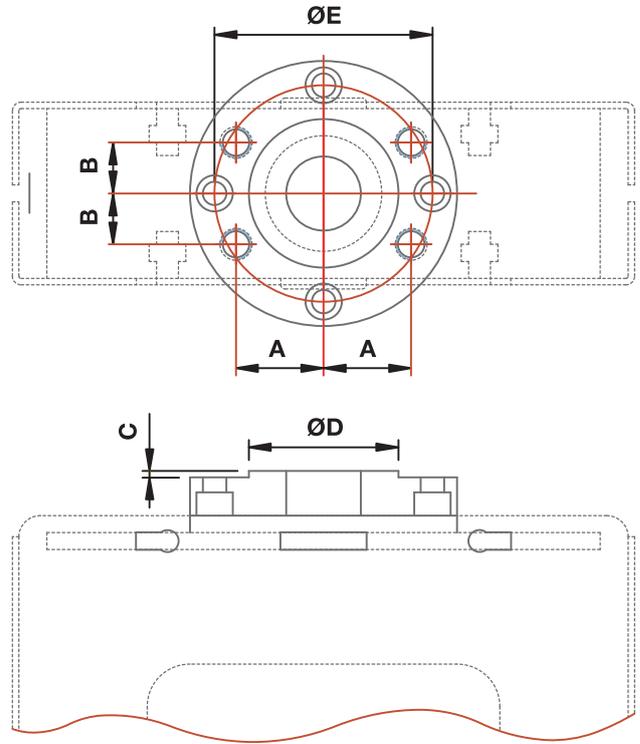


2.2.6. R

R. Gear operator.

Manufactured from DN 50 up to DN 600, for any other sizes, please check with our Technical Department.

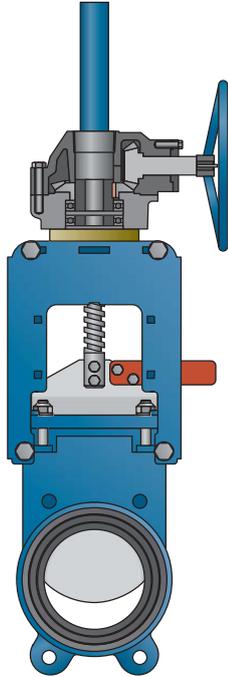


VALVE	STEM SCREW	TYPE OF REDUCER	BRIDGE-FLANGE FASTENING				FLANGE-REDUCER FASTENING	
			A	B	C	ØD	ØE	
DN50	Tr. left 20x4	MANUAL FLO-4	33	19	3	70	4 Allen size M10 on ø102	
DN65	Tr. left 20x4		33	19	3	70		
DN80	Tr. left 20x4		33	19	3	70		
DN100	Tr. left 20x4		33	19	3	70		
DN125	Tr. left 20x4		31	22	3	70		
DN150	Tr. left 20x4		31	22	3	70		
DN200	Tr. left 25x5	MANUAL FLO-4-1	41	24	3	70	4 Allen size M16 on ø140	
DN250	Tr. left 25x5		41	24	3	70		
DN300	Tr. left 25x5		41	24	3	70		
DN350	Tr. left 25x5		41	24	3	70		
DN400	Tr. left 35x6	MANUAL FL1-4	41	24	3	95		
DN450	Tr. left 35x6		55	39	3	95		
DN500	Tr. left 35x6		55	39	3	95		
DN600	Tr. left 35x6		55	39	3	95		

The manufacturer reserves the right to make changes without prior notification.

2.2.6. R

Measurements.

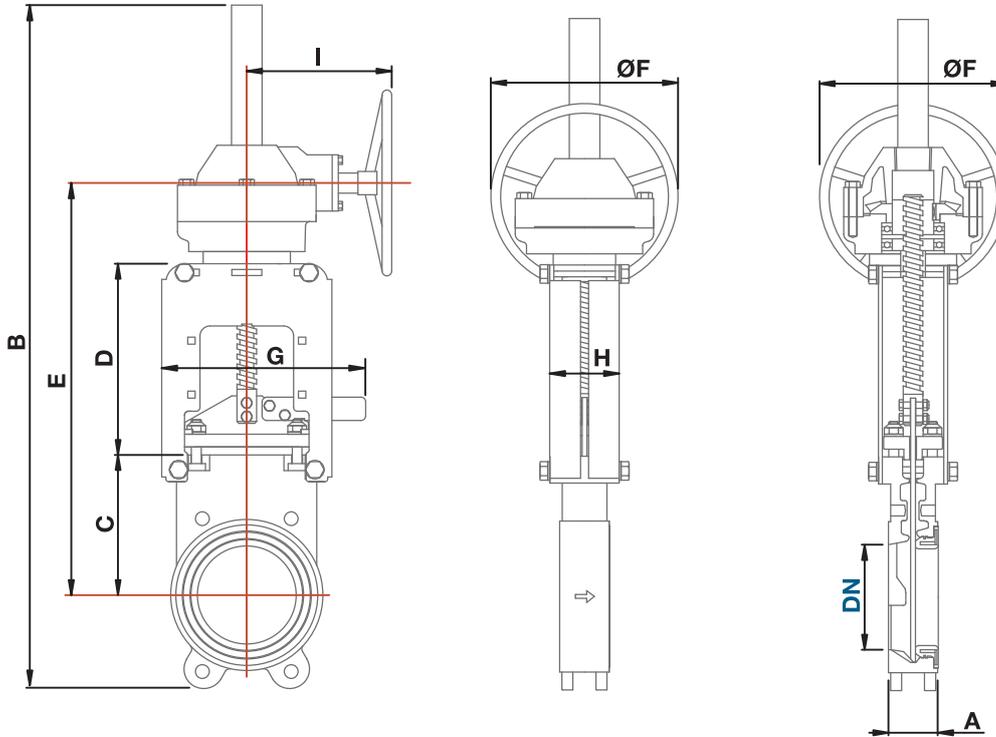

DN	A	B	C	D	E	ØF	G	H	I
50	50	517	115	140	363	300	152	68	197
65	50	546	115	166	389	300	190	68	197
80	50	593	130	175	413	300	187	70	197
100	50	631	143	195	446	300	204	70	197
125	50	739	155	223	486	300	233	78	197
150	60	806	176	254	538	300	259	79	197
200	60	928	204	318	630	300	326	88	197
250	65	1,104	253	364	726	300	370	90	197
300	70	1,290	303	424	836	450	430	95	217
350	90	1,478	343	470	922	450	473	94	217
400	100	1,675	400	549	1,081	450	543	110	260
450	100	1,890	452	599	1,183	450	597	126	260
500	110	2,096	505	675	1,312	650	652	126	288
600	110	2,612	620	836	1,588	650	752	120	288

Assembly between Flanges PN10 / DN Nominal diameter / ØF Handwheel diameter
Measurements in mm.

The manufacturer reserves the right to make changes without prior notification.