
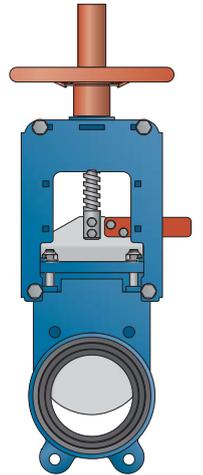


## 2.2.1. VA

### VA. Handwheel with rising stem.

Particularly suitable for facilities in which space is not a problem. Manufactured from DN 50 up to DN 600, for any other sizes, please check with our Technical Department.

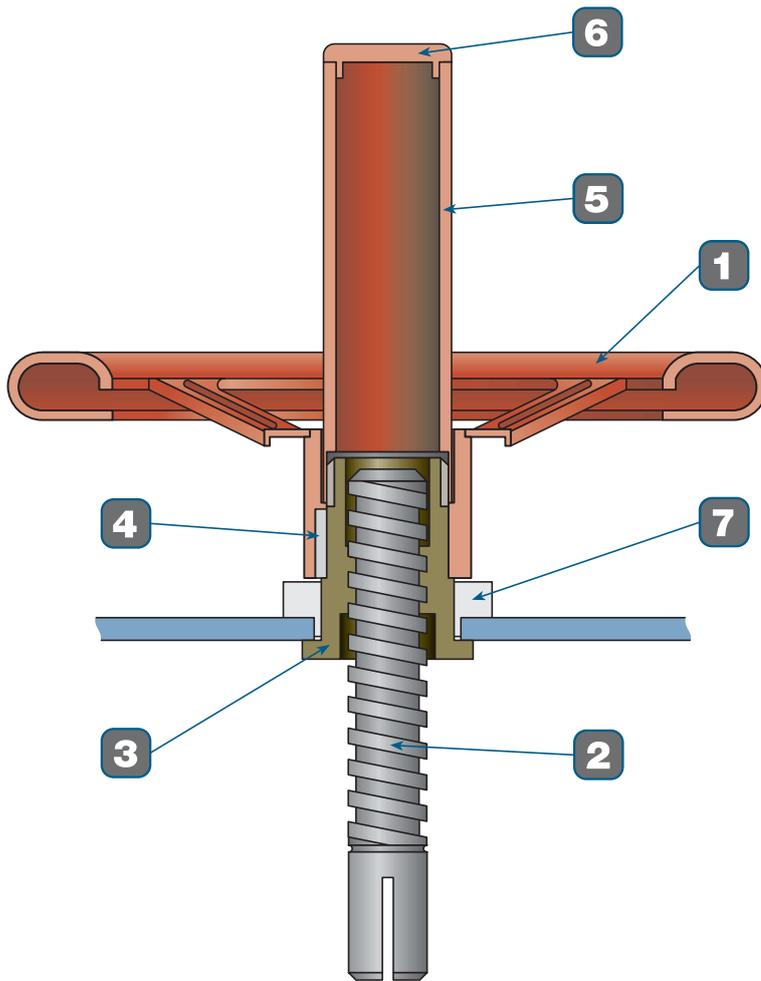


	DESCRIPTION	MATERIAL	U. (units)
1	Handwheel	Steel	1
2	Stem	AISI-303	1
3	Nut	Brass	1
4	Cotter	Steel	1
5	Protection	Steel	1
6	Plug	Plastic	1
7	Bearing	Nylon	1

\* Other materials available on request.

## 2.2.1. VA

Measurements.

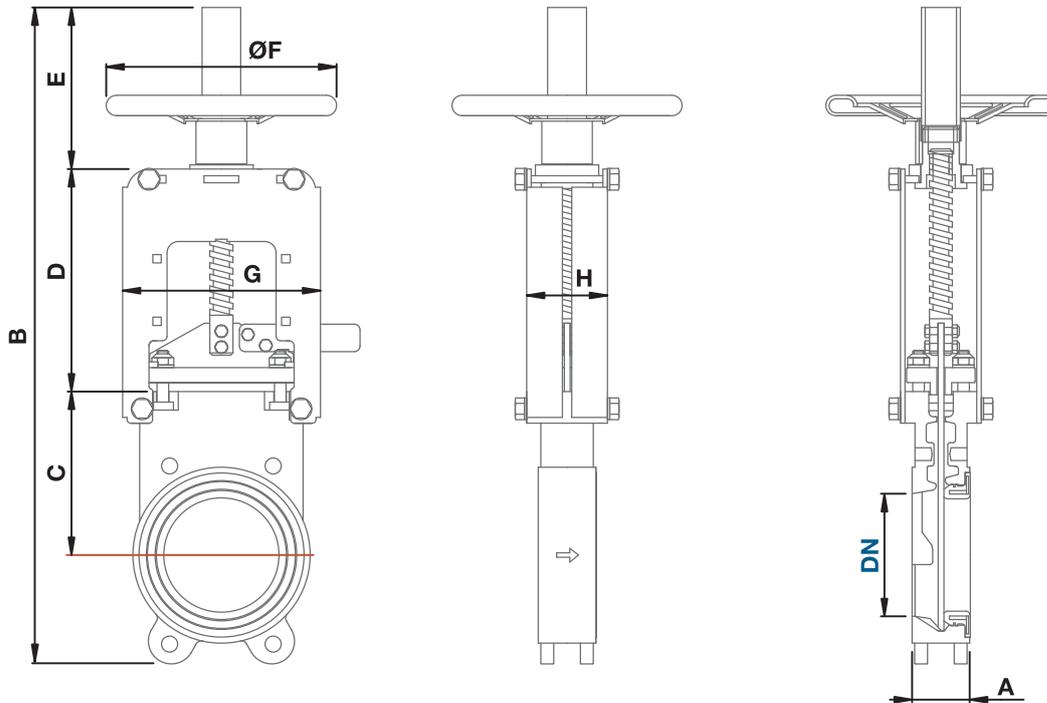

DN	A	B	C	D	E	ØF	G	H	WEIGHT	PN
50	50	464	115	140	144	200	152	68	7	10
65	50	483	115	165	135	200	190	68	8	10
80	50	551	130	175	156	200	187	70	9	10
100	50	575	143	195	142	200	204	70	10	10
125	50	695	155	223	204	250	233	78	15	10
150	60	750	176	254	192	250	259	79	19	10
200	60	946	204	318	266	300	326	88	25	10
250	65	1,103	253	364	297	350	370	90	39	10
300	70	1,303	303	424	361	350	430	95	53	6
350	90	1,429	343	470	399	400	473	94	77	5
400	100	1,665	400	549	475	500	543	110	119	5
450	100	1,874	452	599	519	500	597	126	165	4
500	110	2,086	505	675	575	500	652	126	185	4
600	110	2,573	620	836	727	500	752	120	253	3

Assembly between Flanges PN10 / DN Nominal diameter / ØF Handwheel diameter  
 Weight in Kg. / PN Nominal pressure in bar. / Measurements in mm.

The manufacturer reserves the right to make changes without prior notification.