
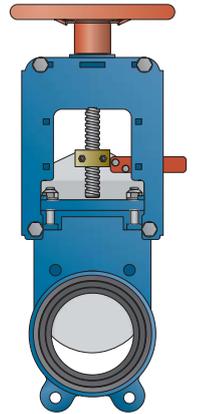


2.2.2. VF

VF. Handwheel with non-rising stem

Manufactured from DN 50 up to DN 600, for any other sizes, please check with our Technical Department.

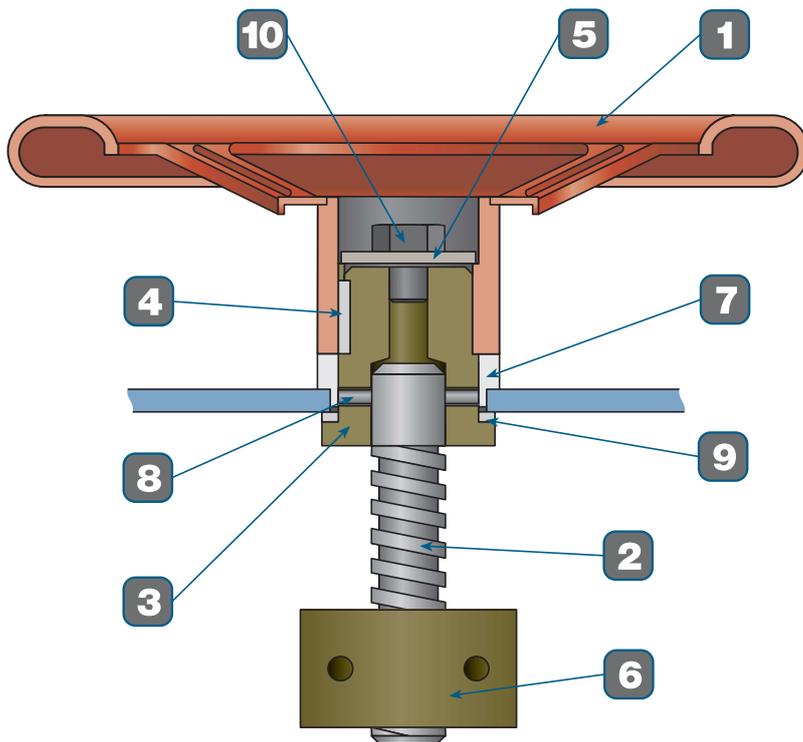


DESCRIPTION	MATERIAL	U.
1 Handwheel	Steel	1
2 Stem	AISI-303	1
3 Nut	Brass	1
4 Cotter	Steel	1
5 Washer	Steel	1
6 Nut	Brass	1
7 Bearing	Nylon	1
8 Pin	Steel	1
9 Washer	Nylon	1
10 Screw	Steel	1

* Other materials available on request.

The manufacturer reserves the right to make changes without prior notification.

2.2.2. VF

Measurements.

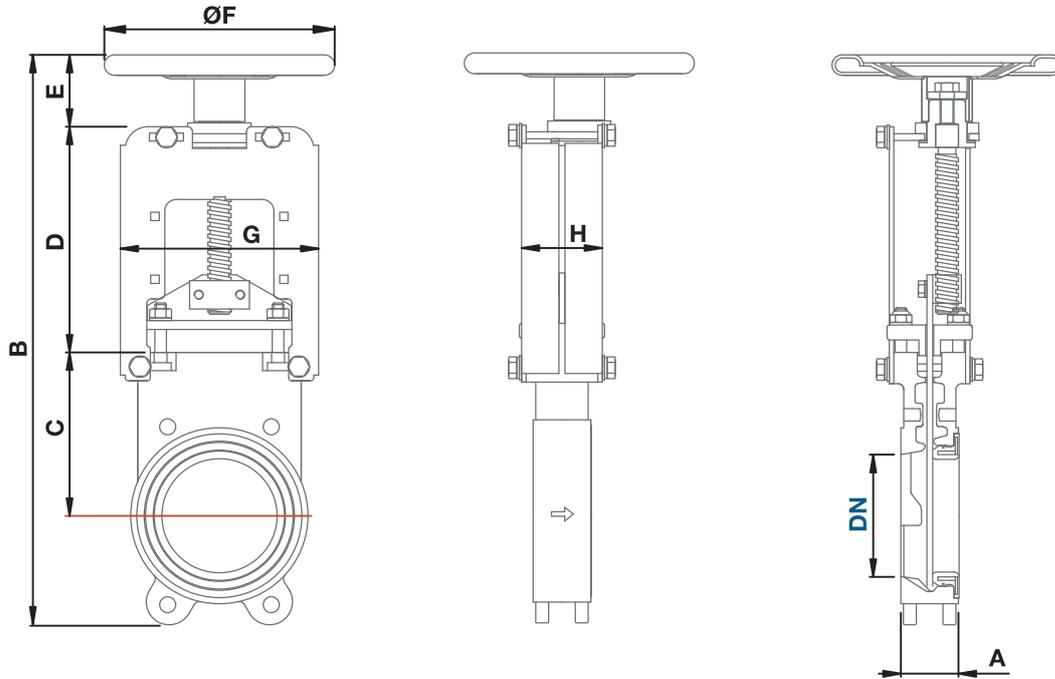

DN	A	B	C	D	E	ØF	G	H	WEIGHT	PN
50	50	391	115	140	71	200	117	68	7	10
65	50	414	115	166	65	200	155	68	8	10
80	50	456	130	175	61	200	152	70	9	10
100	50	496	143	195	63	200	172	70	10	10
125	50	562	155	223	71	250	199	78	15	10
150	60	629	176	254	71	250	226	79	19	10
200	60	791	204	318	111	300	293	88	25	10
250	65	914	253	364	108	350	335	90	39	10
300	70	1,050	303	424	108	350	395	95	53	6
350	90	1,147	343	470	117	400	440	94	77	5
400	100	1,303	400	549	113	500	543	110	119	5
450	100	1,468	452	599	113	500	597	126	165	4
500	110	1,624	505	675	113	500	652	126	185	4
600	110	1,955	620	836	109	500	752	120	253	3

Assembly between Flanges PN10 / DN Nominal diameter / ØF Handwheel diameter
 Weight in Kg. / PN Nominal pressure in bar. / Measurements in mm.

The manufacturer reserves the right to make changes without prior notification.